

OPERATION / PROGRAMMING MANUAL


vl.l EN REV. 03/2015

## **TECHNICAL CHARACTERISTICS**


Power supply	230V AC   12V/24V AC/DC
• Power	3W
Intermittence	50%
Working temperature	-15°C a +55°C
Protection degree	IP54
Construction material	ABS   Polycarbonate
• Luminosity	330LM MAX
• Color of light emitted by the LEDs	White

- Selectable operating mode between:
  - > Flashing 50%
  - > Fixed (courtesy light)
- Translucent polycarbonate orange cover to show yellow lighting.

### **DIMENSIONS**

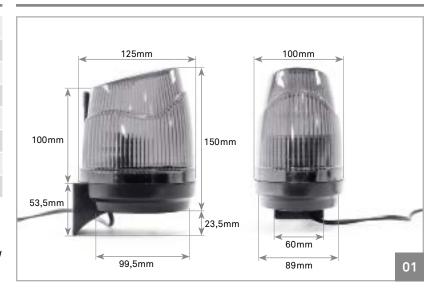


# **CONNECTIONS**

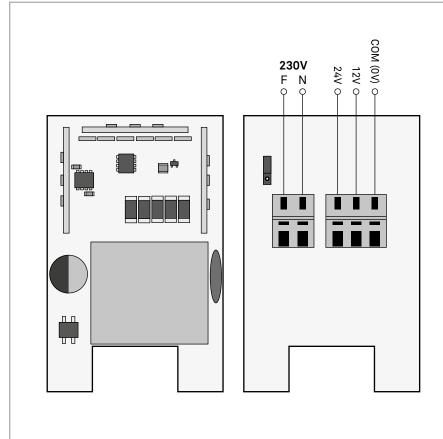

# Courtesy light | Intermittent flashing light:

To alternate between the flashing light operating modes, change the position of the Jumper 1 - J1

JP1 - COURTESY LIGHT mode



JP1 - INTERMITTENT LIGHT mode

